



Slybox Vision System



Slybox V - TP-15,
15" Touchpanel

LED lighting
e.g. module light
ML-300




Up to 4 GigE cameras
Power over Ethernet

Compact · Robust · Flexible mounting
Large variety of interfaces

Slybox Vision System

The compact and robust Slybox vision system - ideal for extreme requirements in industrial environments. The fanless system is extremely flexible due to its variety of interfaces and can be used for various tasks.

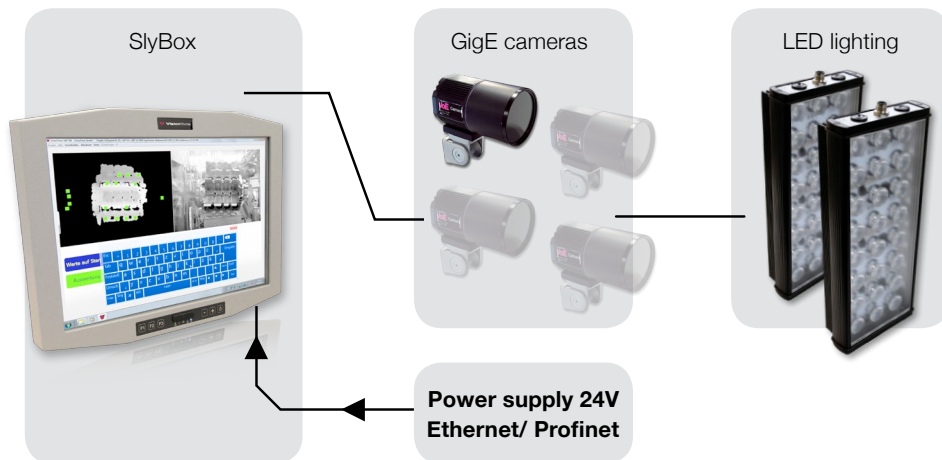

- Industrial PC with **Intel Core i7** Processor and Windows 10 (64 Bit)
- Image Analysis Software **VisionTools V60**
- External supply with **24VDC** and **Ethernet/Profinet**
- **Touch display** with on-screen keyboard, diagonal **15 inch**
- Robust **aluminium housing** with passive cooling
- **Freely programmable function keys**
- **Interfaces:**
 - Profinet
 - TCP/IP client server
 - OPC-Classic and OPC-UA
 - IP S7 Link
 - RFC 1006
 - TwinCat ADS



- Operation with up to **4 GigE cameras**
- **Camera power supply via POE (Power over Ethernet)**
- Ethernet 1000 MBit/s (M12, 8-pin, X-coded)
- Resolution up to 12 MPixel

 **VisionTools**
Bildanalyse Systeme GmbH

Heinrich-Hertz-Str. 7 • 68753 Waghäusel • Deutschland • www.vision-tools.com
info@vision-tools.com • Tel. +49 72 54-93 51-0 • Fax +49 72 54-93 51-200